


ENAMEL

Excellent weatherability
adhesion and workability



ENAMEL

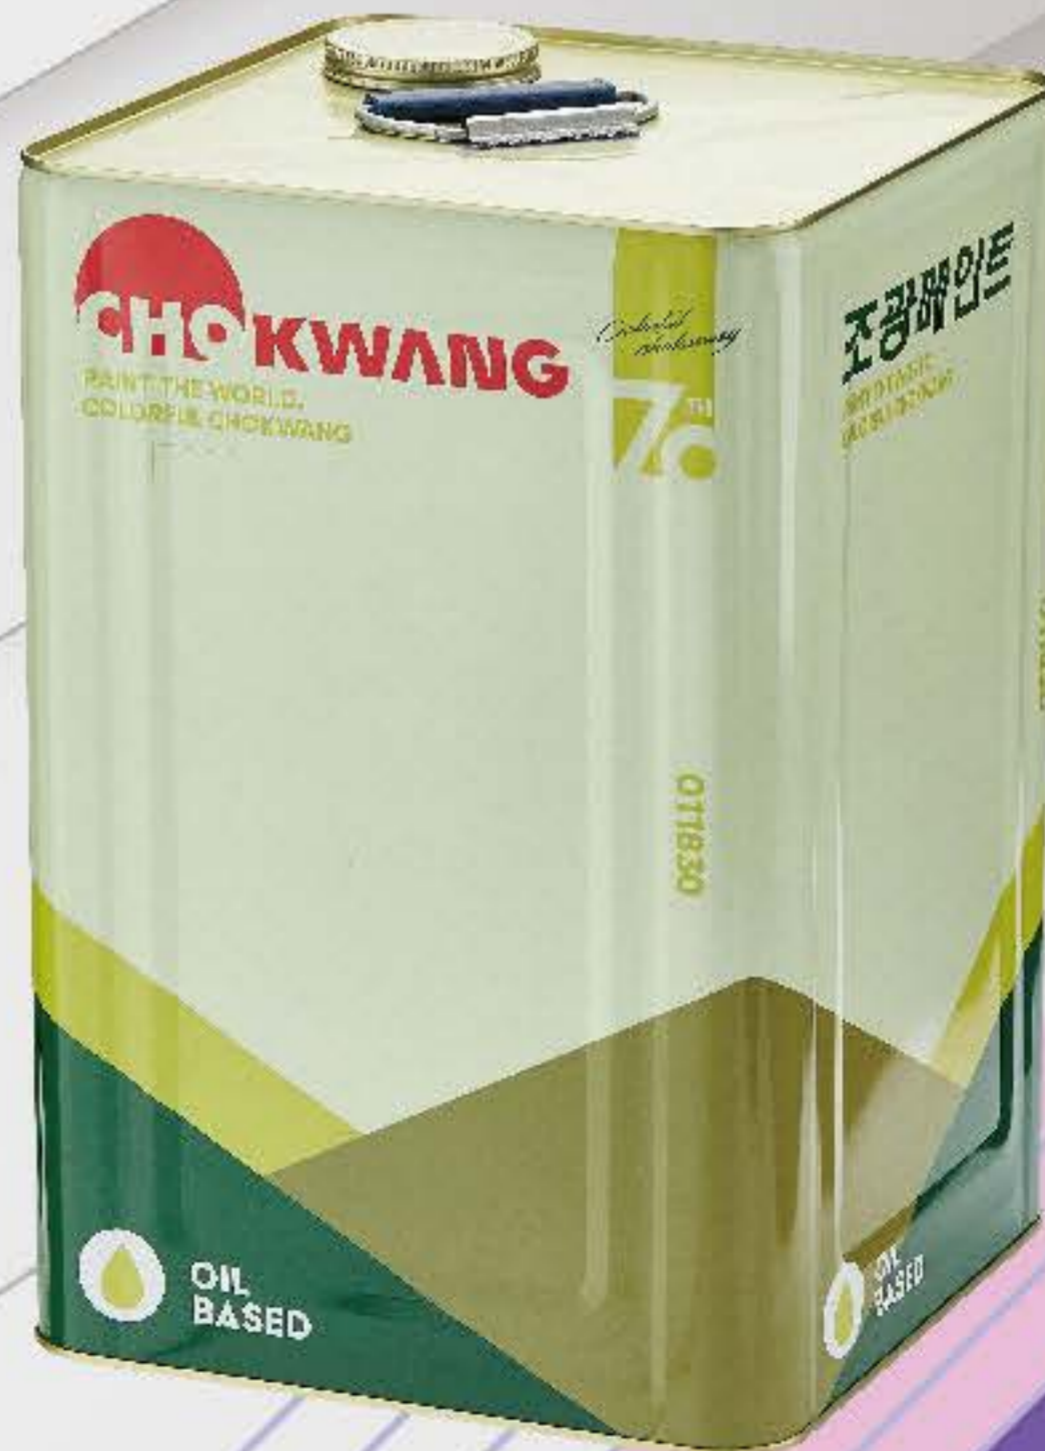


Excellent weatherability
adhesion and workability

CHOKWANG PAINT



Excellent weatherability
adhesion and workability

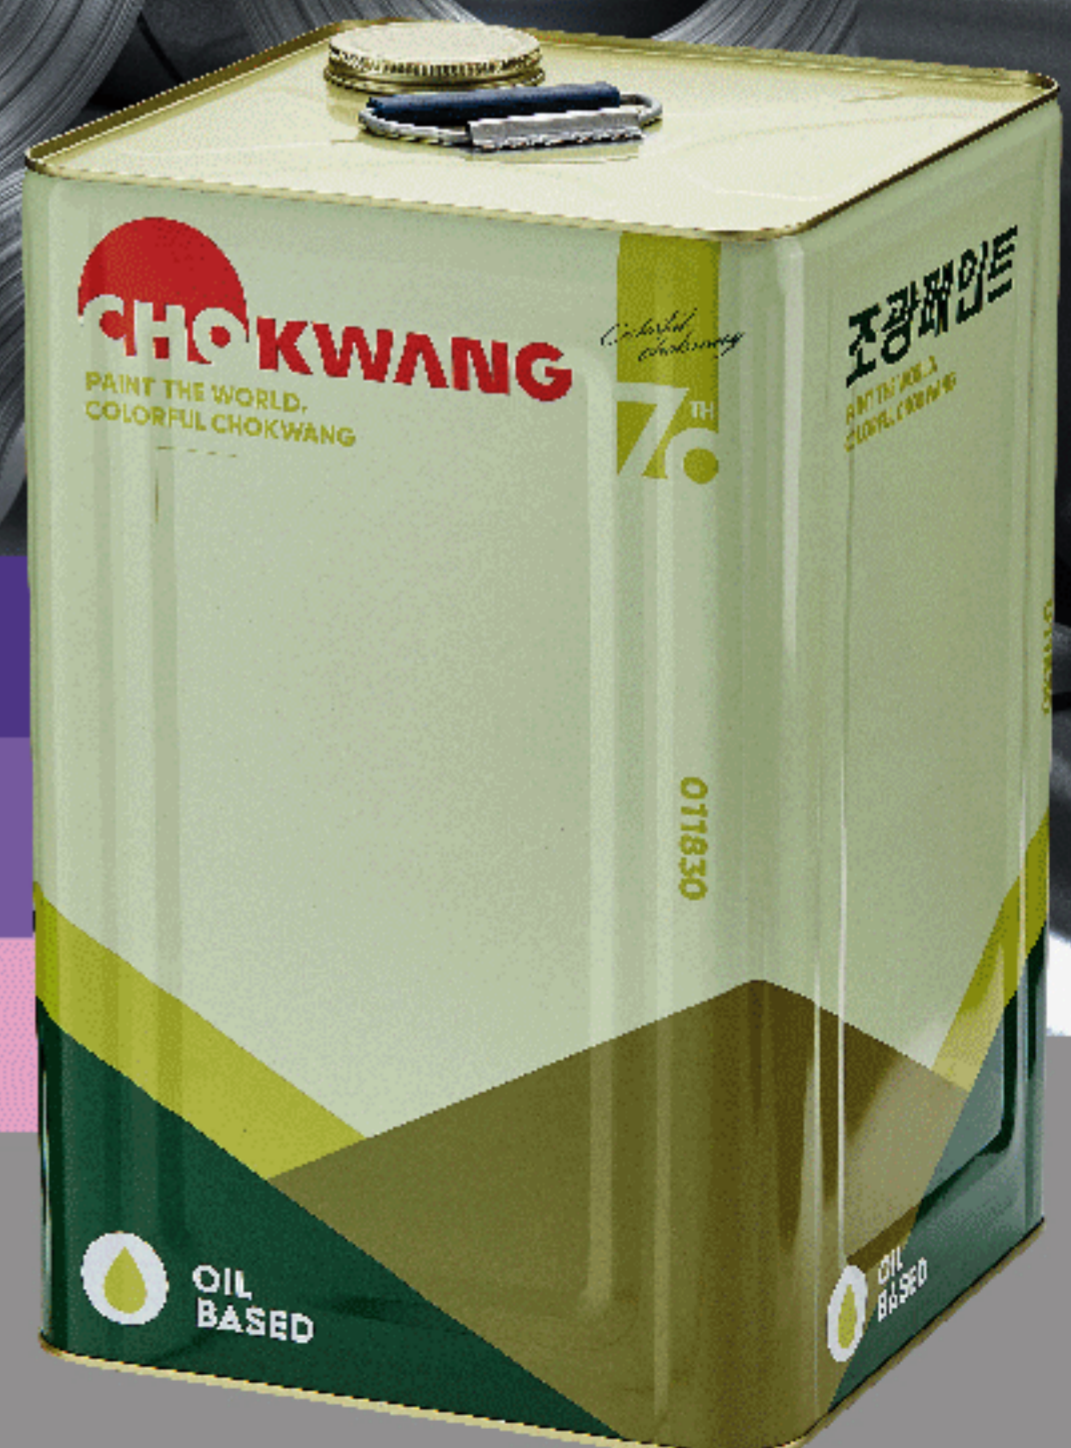


ENAMEL SUPER GLOSS


ALKYD ENAMEL is based medium-oil alkyd resin. It is fast drying and has excellent weather resistance, adhesion and workability

Characteristics


Excellent weatherability, adhesion and workability

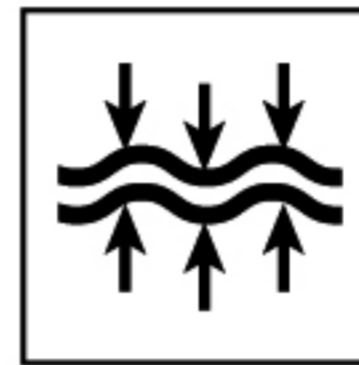

ADHESIVENESS

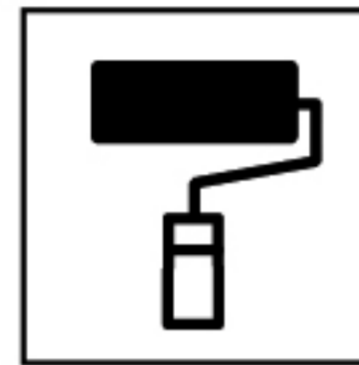

WORKABILITY

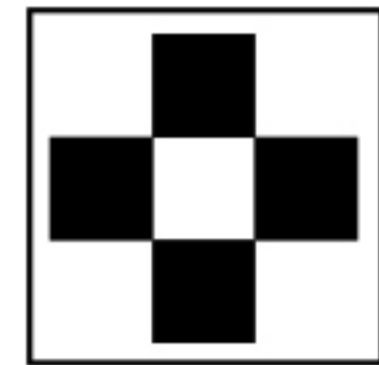

HIDING POWER

Uses

Finish coat for steel, wood and machinery, etc.

Properties

TYPE	Oil-based paint, natural drying type
Color	White & Other color
Gloss(60°)	Matte, semi-gloss
Solid Volume(%)	47+2
Component	1 component
Recommended Dry Film thickness(μm)	60(Based on 2 time μm)
Theoretical Coverage(m ² /ℓ)	7.9(Based on 2 tim
Drying Time(20°C)	Touch: within 2 hours /Coagulation: within 8 hours
Recoating Interval(20°C)	24 hours

Application Method

Spray, Brush, Roller



Precaution



Avoid coating on rainy, humid day(more than 85%), freezing day(less than 5°C)



Transport at 5~35°C and store away from direct sunlight.



Surface temperature should be at least 3°C or higher than dew point to prevent moisture condensation



Tools used additionally for work must be removed before they dry out. It can be reused only after washing it with water and storing it.



Use as soon as possible after opening, and avoid water when storing. Store undiluted, sealed.



Do not mix with other products.

ANTI-CORROSIVE PRIMER

Anti-corrosive primer (brown) is manufactured by mixing and dispersing alkyd resin and special pigment with excellent rust prevention properties

Characteristics


Rust prevention, hiding power, workability



ANTI-CORROSION



WORKABILITY

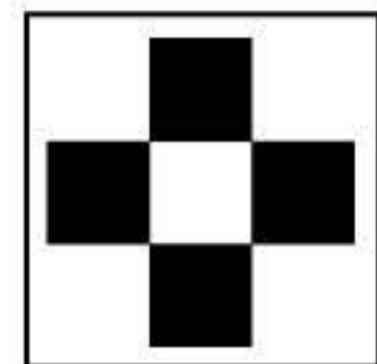

HIDING POWER

Uses

For rust prevention undercoating of steel structures

Properties

TYPE	Alkyd paint
Color	brown & Other color
Gloss(60°)	Matt
Solid Volume(%)	50+2
Component	1 component
Recommended Dry Film thickness(μm)	35~45 μm
Theoretical Coverage(m^2 / ℓ)	approx 12.5 m^2 / ℓ
Drying Time(20°C)	Touch: Within 15 minutes / Solidification: Within 3 hours
Recoating Interval(20°C)	12 hours

Application Method

Spray, Brush, Roller



Precaution



Avoid coating on rainy, humid day(more than 85%), freezing day(less than 5°C)



Transport at 5~35°C and store away from direct sunlight.



Surface temperature should be at least 3°C or higher than dew point to prevent moisture condensation



Tools used additionally for work must be removed before they dry out. It can be reused only after washing it with water and storing it.



Use as soon as possible after opening, and avoid water when storing. Store undiluted, sealed.



Do not mix with other products.



www.ckpc.co.kr

CHOKWANG HEAD QUARTER

148 Samdeok-ro 5(o)beon-gil, Sasang-gu, Busan, 46909, Republic of Korea
+82-51-304-7701

CHOKWANG INDONESIA (Office)

Komplek Bekasi Town Square Blok E-18, Jl. Cut Mutia No. 1-2, RT.003/RW.009
Kel. Margahayu, Kec, Bekasi Tim., Kota Bekasi, Jawa Barat 17113- Indonesia

CHOKWANG INDONESIA-WAREHOUSE

Kawasan Industri Jababeka Tahap 3, Blok B 2 C Jl Tekno 1, Jababeka, Cikarang,
Bekasi 17550 Indonesia

- 임정식 이사 TEL : + 62-812-1000055 · 유준석 이사 (WA) TEL : + 62-811-1225670
- Mr. Johan Arif Pratama TEL : + 62-853-7777-1122